



TRANSPAK

TRANSPAK EQUIPMENT CORP.



**MERCURY
Model TP-702CCQ**

THE WORLD'S VALUE LEADER
A WORLD-CLASS STRAPPING MACHINE COMPANY



MERCURY Model TP-702CCQ

DESCRIPTION

The TP-702CCQ is built with TP-702C corrugated strapper combined with the 3-side squaring station CC-BSS. It offers high strapping productivity with the most cost-effective bundle squaring solution for the corrugated industry.

MAIN FEATURES

Robust & Compact Mechanical Strapping Head.

- TP-702C uses the latest DC brushless motor technology to provide the highest level of accuracy and reliability on the market. All motors are German-made.



- The strapping head has no belts, clutches, or pulleys. It is designed with the up-to-date technology with few moving parts. With 30% fewer parts, TP-702C requires fewer adjustments, has fewer wear components, and requires less maintenance. The simple design of TP-702C minimizes the maintenance cost.



Siemens PLC Control

- Siemens PLC is the state-of-the-art controller. It is programmable and can be expanded flexibly to meet various requirements in different applications.



Free Access to Strap Guides

- Unblocking the guides enables free and quick access to strap guides without use of any tool. The most maintenance friendly design.

3 Side Squaring Bundle Control

- Excellent side squaring and backstop ensure better bundle shape before strapping.



Hinged Roller Table

- Easy to open the table top if maintenance is required. Ergonomic design.



OPTIONS

- Siemens HMI (touch panel)
- Light tree alarm with low strap sensor (triple lamp)
- Foot pedal switch
- Strapping cycle counter



The TP-702CCQ is built with TP-702C corrugated strapper combined with the 3-side squaring station CC-BSS



TP-702C





CC-BSS

TECHNICAL DATA

Capacity	Up to 26 bundle/minute (single strap) 20 bundle/minute (double straps) (Model: TP-702CCQ-L)
Strap Width	5 mm, 6 mm, or 9 mm PP strap
Strap Tension	1 - 32 Kg
Minimum Bundle Size	300 mm (L) 200 mm(W) 20 mm(H)
Bundle Weight	Max 40 kg
Transport Speed	15 – 60 m/minute
Electrical Requirements	220V, 380V, 400V 50/60Hz 3PH

TP-702CCQ

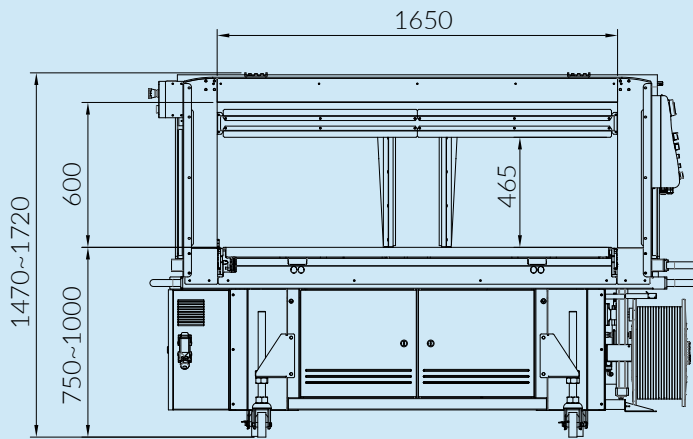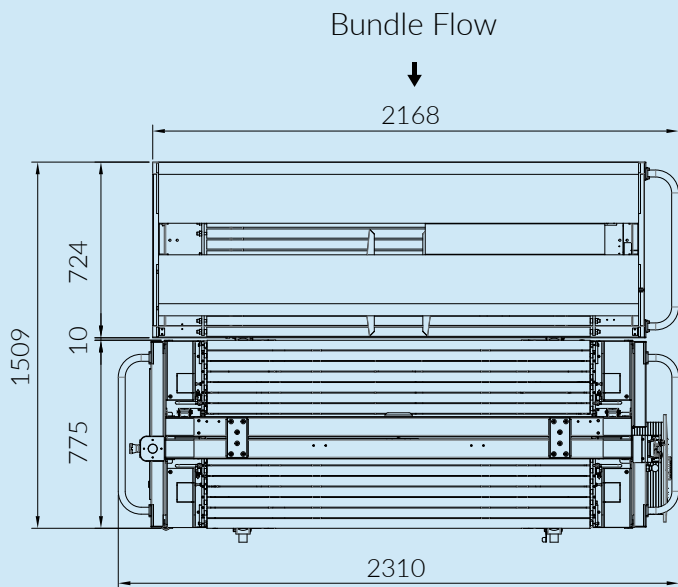

(TP-702CCQ-L)



ARCH SIZES TP-702CCQ (mm)

		M	L
H \ W	1250	1650	
450	✓	✓	



TRANSPAK
TRANSPAK EQUIPMENT CORP.

MADE IN TAIWAN



17901 Von Karman Ave. Suite 600
Irvine, CA, 92614



info@corrugatedboxequipment.com



www.corrugatedboxequipment.com



USA 949 242 9516 / 949 556 8744
MEX 55 7587 7681 / 55 8421 91591