

AMC




DIE CUTTER ROTARY WITH STACKER

Model SYKM-M-I630-3SDT

CHARACTERISTICS

- Lead edge feeder. / • PLC control system can store 999 order data. / • Zero reset function. / • Excellent die-cutting quality. / • High productivity. / • High performance. / • Fully motorized settings. / • All shafts pressure adjusted by hand. / • Gear system adopt spray lubrication. / • All shafts coated hard chromium.

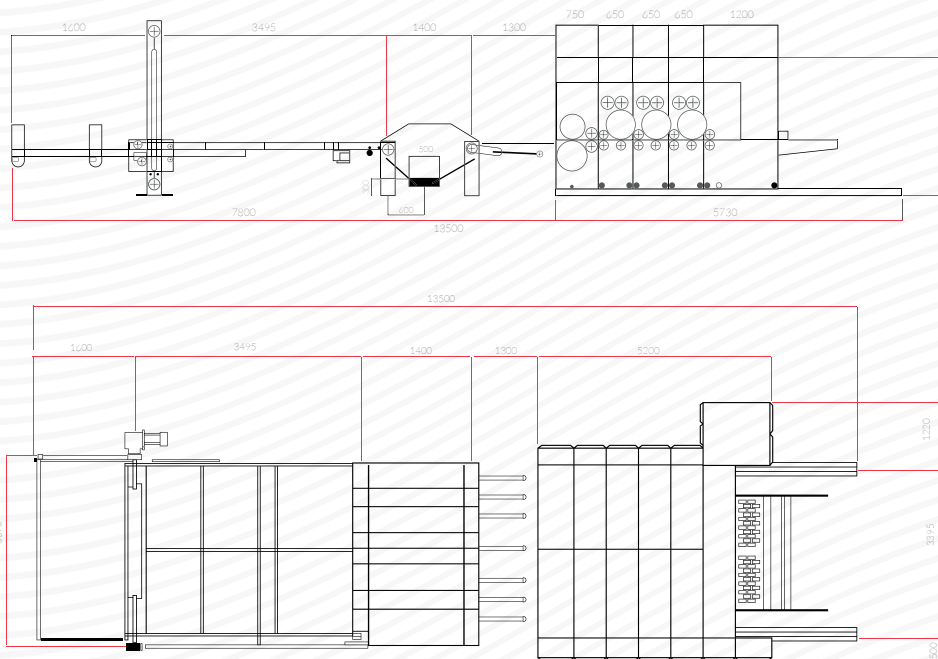

SPECIFICATIONS

Die Cutter Rotary with Stacker Model SYRM-M-1630-3SDT	
Max. Machine Speed	160 Sheet/ Min
Suitable Working Speed	60-100 Sheet/Min
Max. Sheet Size	1600 x 3200 mm
Min. Sheet Size	500 x 760 mm
Max. Printing Area	1550 x 3000 mm
Sheet Thickness	1-10 mm
Printing Die Thickness	5-7mm
Max. Slotting Depth	7 x 350 mm
Feeding Accuracy	+/- 1.0 mm
Printing Accuracy	+/- 0.5 mm
Die Cutting Accuracy	+/- 1.5 mm
Weight	21000 KG
Machine Dimension	15500 x 4800 x 2200 mm

MODULES

Feeding Unit

- Lead Edge Feeder
- Sheet Stop Adjustment
- Vacuum Dust Removing Device
- Feeding Roller
- Start Protection Device
- Control Panel



Printing Unit

- Anilox Roll Coated Hard Chromium, Line Screen 200-240 LPI
- Ceramic Anilox Roll, Line Screen 300-450 LPI (OPTIONAL)
- Doctor Roll
- Pressure Regulation
- Printing Registration Regulation
- Registration Locking System
- Diaphragm Ink Pumps
- Control Panel



Die Cutting Unit

- Anvil Cylinder Surface Coated Hard Chromium
- Speed Differential Compensation Function
- Anvil Cover Brand Maxdura, Dicar, CUE
- Anvil Cover Repairing Device
- Die Cutting cylinder Surface coated hard chromium
- Regulation of die cutting cylinder registration
- Pneumatic Lift Device
- Independent Servo Motor Drive
- Control Panel



Slotting Unit

- Pre-Creasing Wheel
- Creasing Wheel
- Slotting Blade Shaft
- Slotting Blade / Trimming blade
- Regulation of Slotting Unit, is controlled by PLC and adjusted through touch screen
- Slotting Registration Regulation
- Control Panel



Vibration Stacker (Optional)

- Pneumatic Control Front Conveyor
- Speed Control of Vibration
- Scrap Conveyor
- Lateral Waste Scrap Conveyor Belt



Stacker Unit (Optional)

- Automatic and Manual Model
- Transmitting Belt
- Sheet Stacking Height 1600mm
- Sheet Collecting Table
- Vibrator Stacker (OPTIONAL)



AMC


BOX



 17901 Von Karman Ave. Suite 600
Irvine, CA, 92614

 info@corrugatedboxequipment.com

 www.corrugatedboxequipment.com

 USA 949 242 9516 / 949 556 8744
MEX 55 7587 7681 / 55 8421 91591