



AMC MACHINERY




DOUBLE HEAD SEMIAUTOMATIC STITCHER

Model DSAT 2400 / 3000



DESCRIPTION

AMC Double Head Semiautomatic Stitcher DSAT is suitable for stitching big boxes of single and double wall corrugated board, adopt full computerized control, change is convenient and fast, easy operation, it can stitch two-piece combined box and also can stitch single piece box.

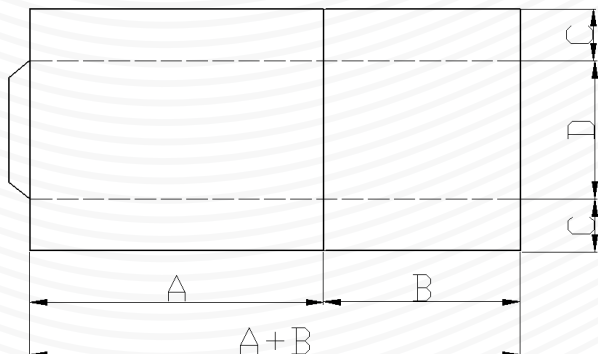

Model	DSAT-2400	DSAT-3000
Max. Stitching Width (A+B)x2	4800mm	6000mm
Min. Stitching Width (A+B)x2	1100mm	
Max. box length (A)	2350 mm	2850 mm
Min. box length (A)	350 mm	
Max. box width (B)	2150 mm	2650 mm
Min. box width (B)	120/180 mm	
Max. sheet height (C+D+C)	2900 mm	
Min. sheet height (C+D+C)	400 mm	
Max. cover size (C)	450 mm (600 mm for optional)	
Min. cover size (C)	80 mm (20 mm for optional)	
Max. box height (D)	2000 mm	
Min. box height (D)	150 mm	
Flap width	35-40 mm	
Distance between first stitch and the board edge	25 mm	
Stitching Speed	600 Stitches/min	
Stitches distance	30-120mm	
Stitching thickness range 1	1-8 mm Min. B is 180 mm	
Stitching thickness range 2	8-14 mm Min. B between 120-179 mm	
Stitches quantity	1-99 Stitches	
Power	7KW	
Machine dimension	7500x4500x1950 mm	7500x5000x1950 mm
Stand size	2800x1600x1200 mm	
Machine Weigth	3200 Kg	3600KG



CHARACTERISTICS

- For single or two pieces corrugated box.
- Suitable for both single and double head stitching.
- Can be stitch Single / Double // Reinforcing, can be adapted to different customers requirements of stitches types.
- Servo system and PLC program.
- Touch screen operation
- Order adjustment can store 1000 orders.
- Electric control stitching size.
- Automatic counter.
- Computer control stitches distance.
- Servo Motor Drive.
- Automatic Control.
- Automatic Wire Feeding.


SINGLE STITCHING	DOUBLE STITCHING	TIE STITCHING

Parts


Main



Conveyor

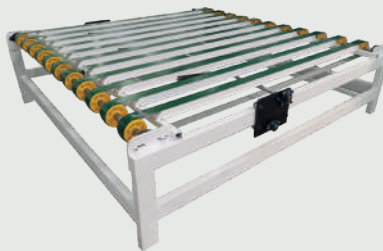

Stitching Head

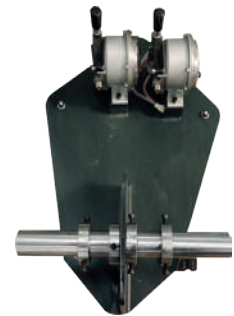



AMC MACHINERY


BOX



 17901 Von Karman Ave. Suite 600
Irvine, CA, 92614

 info@corrugatedboxequipment.com

 www.corrugatedboxequipment.com

 USA 949 242 9516 / 949 556 8744
MEX 55 7587 7681 / 55 8421 91591